



SCRUBBER DRYERS RAPID 15



RAPID 15 FAMILY: AN IMPORTANT POINT OF REFERENCE IN THE SEGMENT OF COMPACT SCRUBBER DRYERS. THE IDEAL SOLUTION FOR ANY KIND OF ENVIRONMENT AND SURFACES, EVEN THE NARROWEST AND LEAST ACCESSIBLE ONES.

RAPID 15 FAMILY

The small walk behind scrubber dryer Rapid 15 represents a relevant point of reference in the scrubber dryers' segment. A complete set of combined and synergical solutions makes Rapid 15 the most suitable answer for any cleaning need in small-medium areas. Rapid 15 distinctive feature is flexibility. The front knob allows the user to adjust the brush incidence to the floor, so ensuring a perfect adherence to any working surface with excellent cleaning results. The practical external wheel (available for Hybrid, BC and Lithium versions) allows to adjust the height of the head, avoiding overloads of the engine on "difficult" surfaces. The squeegee



TANKS

The solution tank can be filled easily thanks to its wide in-feed and to its practical standard filling hose. The recovery tank is easy to inspect, to clean and to remove in order to facilitate emptying operations.



HANDLE

Equipped with integrated controls for an intuitive management of all machine functions. It is fully adjustable to ensure an easy control and parking of Rapid 15.



BRUSH AND EXTERNAL WHEEL ADJUSTMENT


The front knob allows the user to adjust the brush incidence angle on the floor, enabling Rapid 15 to perfectly adhere to the working surface in any situation, even the most difficult ones, avoiding overloads of the engine and guaranteeing excellent cleaning results. The external wheel allows the user to adjust the height of the head, depending on the kind of working surface.

system perfectly covers the water track in any condition, for excellent drying results. And the new pedal lifting system makes it even more comfortable for the user and reliable. Innovative features that, together with the compact dimensions, make Rapid 15 the perfect solution for every environment and surface, above all in narrow spaces.



SQUEEGEE SYSTEM

Compact and placed immediately behind the head, the squeegee system allows Rapid 15 to bend up to an angle of 270 °, fully covering the water track. In addition to that, Rapid 15 is equipped with a modern and reliable pedal-operated squeegee lifting system which makes working with the machine even more practical: for perfect drying results even on the most difficult floors and surfaces.



LITHIUM BATTERY

It guarantees 1 hour working time and can be charged at any time, even partially, without any risk of damage ("no memory effect"). It is possible to recharge the machine even during short breaks in use (for Lithium version).



HYBRID KIT

Unlimited autonomy and non-stop working sessions thanks to the innovative Hybrid system. More than two hours autonomy with the use of standard lithium batteries and the possibility of switching to the power supply by resorting to the standard 15m cable.



EUNITED PERFORMANCE LABEL

EUnited Cleaning Scrubber Drier Performance Label is developed by the association EUnited Cleaning composed of the leading manufacturers of cleaning machines in Europe and it is based on Technical Specification TS 35000 and international standard IEC/EN 62826, both living documents. Through a reproducible test, which allows an objective comparison of the cleaning performance of different machines, it is possible to identify and label the scrubber dryer machines that have high cleaning efficiency whilst using the least amount of water and energy. The label itself must be viewed as the cleaning machine industry's commitment to create a sustainable future as well as a clean environment. It is paramount to the involved companies that a resource efficient cleaning is a necessary step to adapt to future energy needs.

RAPID 15 E 38

ELECTRIC

TYPE	REF. NO
RAPID 15 E 38	10.0060.01



Adjustable handle



15 m detachable cable



Front knob adjustable deck



Foot pedal squeegee lifting system

RAPID 15 M 38 HYBRID

BATTERY OPERATED + CABLE, MANUAL, WITH HYBRID KIT

TYPE	REF. NO
RAPID 15 M 38 HYBRID	14.0050.01

Hybrid

Hybrid: the innovative system, only for Hybrid version, which combines power supply with battery power (lithium batteries up to 2 hours running time and 1 hour charging time) in order to guarantee the perfect mix between performance, working time and prolonged cleaning sessions



External wheel, adjustable pressure



Hybrid Kit



Squeegee and rotation (up to 270° rotation)

TECHNICAL DATA

TYPE	REF. NO	POWER SUPPLY	TANK CAPACITY (SOL/REC)	CLEANING WIDTH	SQUEEGEE WIDTH
RAPID 15 E 38	10.0060.01	Cable 230 V - 50 Hz	15/16	385	450
RAPID 15 M 38 HYBRID	14.0050.01	Lithium battery 24V + Cable 230 V - 50 Hz	15/16	385	450
RAPID 15 M 38 BC	13.0050.01	Battery 24V	15/16	385	450
RAPID 15 M 38 LITHIUM	15.0050.01	Lithium battery 24V 490Wh	15/16	385	450

RAPID 15 M 38 BC

**BATTERY OPERATED, MANUAL,
WITH ON BOARD BATTERIES AND CHARGER**

TYPE	REF. NO
RAPID 15 M 38 BC	13.0050.01



Adjustable handle



External wheel,
adjustable pressure



Foot pedal squeegee
lifting system



Removable lid
+ floating ball + filter

RAPID 15 M 38 LITHIUM

**BATTERY OPERATED, MANUAL, WITH LITHIUM
BATTERY AND ON BOARD BATTERY CHARGER**

TYPE	REF. NO
RAPID 15 M 38 LITHIUM	15.0050.01



Lithium: thanks to the lithium battery, which boasts an autonomy of 1 hour and can be charged at any time, even partially and without risk of damage (no "memory effect"), it is possible to recharge the machine even during short breaks in use.



Front knob adjustable
deck



Lithium battery



Squeegee and rotation
(up to 270° rotation)

INSTALLED POWER	PRODUCTIVITY (THEOR./PRACTICAL)	RUNNING TIME	DOWN PRESSURE - CONTACT PRESSURE	NOISE LEVEL	DIMENSIONS
W	m ² /h	h - min	Kg - g /cm ²	dB(A)	mm
620	1540-770	-	21 - 26,7	65	855x430x1100
510	1540-920	2 h	25,5 - 32,4	65	865x430x1100
510	1540-920	1 h	25,5 - 32,4	65	865x430x1100
510	1540-920	1 h	25,5 - 32,4	65	865x430x1100

STANDARD ACCESSORIES



SOLUTION TANK FILLING HOSE

Extendible and equipped with universal coupling for all types of tap




POLYPROPYLENE BRUSHES

Resistant and suitable for any type of surface thanks to the bristles with a diameter of 0.7 mm



15 M DETACHABLE CABLE

For electric version

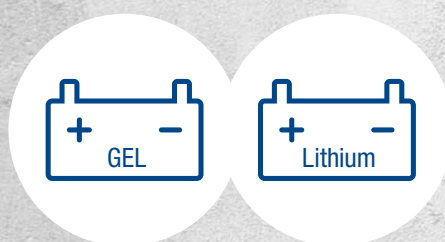

BATTERIES

Set of two gel batteries 12V 25 Ah (for BC version), lithium battery 24V 490Wh (for Lithium version)



ON BOARD CHARGER

The batteries are easily rechargeable in different or distant places, without having to go back to the same place (as standard in BC and Lithium versions).



HYBRID KIT

Lithium battery 24V + Cable 230 V - 50 Hz (for Hybrid version)



POLYURETHANE SQUEEGEE BLADES

Highly resistant to wear and oils, suitable for any type of surface.

STANDARD ACCESSORIES

REF. NO	TYPE	RAPID 15 E 38	RAPID 15 M 38 HYBRID	RAPID 15 M 38 BC	RAPID 15 M 38 LITHIUM
30.0024.00	Filling hose	•	•	•	•
40.0008.00	15" Polypropylene brush ø 0.7	•	•	•	•
34.0285.00	15 m detachable cable	•			
18.0017.01	Gel battery set (2 pcs) 12V 25 Ah			•	
18.0094.00	Lithium battery 24V 490Wh				•
18.0032.01	On board battery charger 24V 5A			•	
18.0032.02	On board battery charger 24V 5A				•
---	Hybrid kit		•		
95.0009.00	Set front/rear polyurethane blade	•	•	•	•

OPTIONAL ACCESSORIES



POLYPROPYLENE BRUSHES

Resistant and suitable for any type of surface. Available with bristles of diameter 0,5 mm and 0,9 mm



TYNEX BRUSHES GRIT 240

Ideal for cleaning rough surface with stubborn dirt thanks to the bristles with a diameter of 0,9 mm



PAD HOLDERS

For using the machine with pads. Equipped with quick coupling/uncoupling system



RUBBER SQUEEGEE BLADES

For the best drying performance



SPLASH GUARD

To protect the most sensitive parts of the machine and the working environment

WIDE RANGE OF PADS SUITABLE FOR ALL NEEDS



WHITE PADS VERY SOFT

Disc suitable for the polishing of coated floors.
Ø 15" - 380 mm: ref.no C15-WH



RED PADS MEDIUM SOFT

Disc suitable for regular maintenance; cleaning sign removal
Ø 15" - 380 mm: ref.no C15-RE



GREEN PADS MEDIUM HARD

Disc suitable for partial wet stripping of not coated hard surfaces, for preparing hard surfaces before new coating and for stripping of linoleum and vinyl surfaces.
Ø 15" - 380 mm: ref.no C15-GR

OPTIONAL ACCESSORIES

REF. NO	TYPE	RAPID 15 E 38	RAPID 15 M 38 HYBRID	RAPID 15 M 38 BC	RAPID 15 M 38 LITHIUM
40.0408.00	15" Polypropylene brush soft ø 0,5	•	•	•	•
40.0108.00	15" Polypropylene brush ø 0,9	•	•	•	•
40.0208.00	15" Tynex brush grit 240 - ø 0,9	•	•	•	•
40.1008.00	Pad holder 355 mm (for 15" pad)	•	•	•	•
95.0008.00	Set front/rear rubber blade	•	•	•	•
95.0082.00	Splashguard with bristles	•			
95.0088.00	Splashguard with bristles		•	•	•

RAPID 15

AT A GLANCE

**RECOVERY TANK COVER**

easy to remove.
Immediate access to the recovery tank

FILLING PORT

to quickly fill the solution tank,
also thanks to the practical
standard filling hose

FRONT HEAD AND KNOB

385 mm cleaning width, the head
angle can be easily adjusted
thanks to the front knob

EXTERNAL WHEEL

to easily adjust the brush head. It assures the
correct floor pressure and it avoids
motor overchargers
(for Hybrid, BC and Lithium versions)

HANDLE

completely adjustable without any effort,
with integrated working functions

POLYETHYLENE TANKS

Maximum reliability and resistance
against crack and dents

DRAIN HOSE

to quickly empty
the recovery tank

SQUEEGEE

It perfectly follows the machine in all its move-
ments. The blades can be easily
removed/cleaned/changed without tools